


5 LEADS, #18, .062 THICK INSUL. TO EXTEND BEYOND MOTOR.
BLK=36.000 +3-0, RED=36.000 +3-0,
YEL=36.000 +3-0, WHT=36.000 +3-0,
BLU=36.000 +3-0.

#16 GREEN GROUND LEAD TO BE 6.000±.250 BETWEEN CENTERS OF TERMS. TERM TO FIT #10 SCREW.

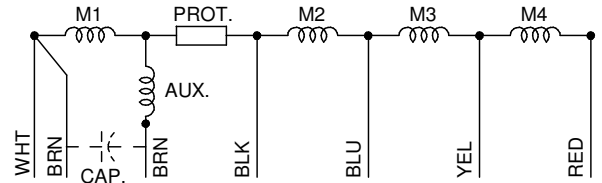

REV. B

NIDEC MOTOR CORPORATION 30-Mar-12

L.R. AMPS	BEARING
5.0	SA

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
K55ZZJRK-9269		VAL Y CONTROL	1/6	127	2.2	60	1500 / 4 SPD	C.W. LEAD END	

SHEET NUMBER	REV	REVISION RECORD FOR: C5340-00
1 OF 1	B	UPDATED BACKGROUND TO NIDEC
REVISION DATE		
30-MAR-12		

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

NIDEC MOTOR CORPORATION

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

ISSUED BY	REVIEWED BY	ENGINEER APPROVED	TITLE	CODE	ITEM NO.	SIZE
J.PATROCINIO	J.I.SALAZAR	J.I.SALAZAR	ASSEMBLED VIEW	V01	739266	A