

RESCUE® Select™ OEM Replacement ECM Blower Motor

APPLICATIONS:

Universal high efficient ECM motor designed as a drop-in replacement for OEM constant torque motors.




6651RS

Replaces X13®† and SeleTech® constant torque ECM motors

- Programmed Torque Values set to match OEM performance*
- Uses Equipment's existing connections, for ease of installation
- High Efficiency Design
- Smooth, Quiet Start-Up and speed changes
- Potted Electric Module for Superior Moisture Protection
- 6000V Surge Protection
- Quiet Operation
- Belly Band Mounted
- Reversible Rotation
- Ball Bearings

NEW

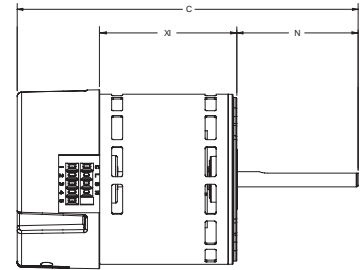

| HP | RPM/Spds | Voltage | Catalog Number | List | Amps | Shaft N | Shell XI | Total C | Shaft Diameter | Ship Wt. | Notes |
|---------|----------|---------|----------------|-------|---------|---------|----------|---------|----------------|----------|-------|
| 1 | 1050/Var | 208-230 | 6651RS | \$606 | 6.4-6.6 | 4.5 | 5.5 | 12.8 | 0.500 | 18.0 | - |
| 3/4 | 1050/Var | 208-230 | 6641RS | \$508 | 6.3-6.1 | 4.0 | 5.5 | 12.2 | 0.500 | 16.3 | - |
| 1/2-1/3 | 1050/Var | 208-230 | 6631RS | \$437 | 4.6-4.3 | 3.5 | 5.5 | 11.8 | 0.500 | 18.8 | - |
| 1 | 1050/Var | 115 | 6650RS | \$606 | 10.6 | 4.5 | 5.5 | 12.8 | 0.500 | 18.0 | - |
| 3/4 | 1050/Var | 115 | 6640RS | \$508 | 9.3 | 4.0 | 5.5 | 12.2 | 0.500 | 15.0 | - |
| 1/2-1/3 | 1050/Var | 115 | 6630RS | \$437 | 6.4 | 3.5 | 5.5 | 11.8 | 0.500 | 12.0 | - |

Note: Above motors must be programmed before sale to contractor. If interested in participating in this program, please contact us at 855-487-6686.

* Kit 33 required to program motors

† All marks shown within this document are properties of their respective owners.

