OCA SERIES CONDENSER

General Features:

The high efficient coils are made from high quality cooper tube Ø9.52 mm / Ø3/8" and special profile aluminium fins. Heat exchangers are supplied clean and tested under a pressure of 30 bars.

- **The Casing:**
  High corrosion strenght galvanized steel, impact resistance, and does not produce polluting debris.

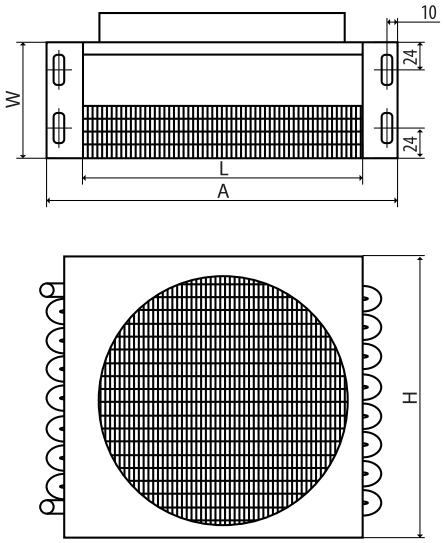

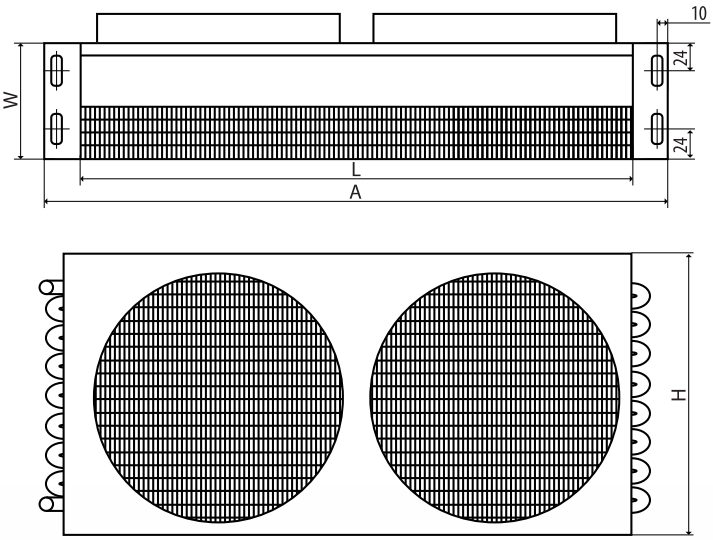

General information

Model/ Modelo	Tubes Nº/ Tubos Nº	Capacity/ Capacidad DT1=15K		Fin spacing/ Espacio entre aletas (mm)	Surface/ Superficie (m^2)	Dimensions/ Dimensiones (mm)				Connection/ Conexión		Suggested Fan/ Ventilador	
		HP	Btu/h			A	H	W	L	Inlet/ entrada	Oulet/ Salida	Nº X Ø	Air Flow/ volúmen de aire (m^3/h)
OCA-82*	8 × 2	1/5	2839	3,5	1,2	280	245	100	240	3/8"	3/8"	1 × 200	640
OCA-83*	8 × 3	1/4	3465	3,5	1,8	280	245	125	240	3/8"	3/8"	1 × 200	640
OCA-84*	8 × 4	1/4	4159	3,5	2,4	280	245	150	240	3/8"	3/8"	1 × 200	640
OCA-92	9 × 2	1/4	3906	3,5	1,6	310	285	100	270	3/8"	3/8"	1 × 250	940
OCA-93*	9 × 3	1/3	4919	3,5	2,3	310	285	125	270	3/8"	3/8"	1 × 250	940
OCA-94*	9 × 4	3/8	5769	3,5	3,1	310	285	150	270	3/8"	3/8"	1 × 250	940
OCA-103	10 × 3	1/3	5136	3,5	2,6	310	285	125	270	3/8"	3/8"	1 × 250	940
OCA-104*	10 × 4	3/8	6022	3,5	3,4	310	285	150	270	3/8"	3/8"	1 × 250	940
OCA-114	11 × 4	1/2	6510	3,5	4,1	340	290	150	300	3/8"	3/8"	1 × 250	940
OCA-124A	12 × 4	1/2	6745	3,5	4,5	340	315	150	300	5/8"	1/2"	1 × 250	940
OCA-124B	12 × 4	5/8	9512	3,5	5,2	420	365	150	350	5/8"	1/2"	1 × 300	1640
OCA-143	14 × 3	5/8	8590	3,5	4,6	420	365	150	350	5/8"	1/2"	1 × 300	1640
OCA-144	14 × 4	5/8	10091	3,5	6,1	420	365	150	350	5/8"	1/2"	1 × 300	1640
OCA-145	14 × 5	3/4	11067	3,5	7,6	420	365	175	350	3/4"	5/8"	1 × 300	1640
OCA-163	16 × 3	7/8	13291	3,5	6,4	500	420	150	430	5/8"	1/2"	1× 350	2930
OCA-164A	16 × 4	1	15461	3,5	8,6	500	420	150	430	3/4"	5/8"	1 × 350	2930
OCA-164B	16 × 4	1,25	20561	3,5	9	520	465	200	450	3/4"	5/8"	1 × 400	3710
OCA-165	16 × 5	1,5	22713	3,5	11,2	520	465	200	450	3/4"	5/8"	1 × 400	3710
OCA-185	18 × 5	1,75	24811	3,5	14	570	465	200	500	3/4"	5/8"	1 × 400	3710
OCA-104D	10 × 4	7/8	11845	3,5	6,7	610	285	15	540	5/8"	1/2"	2 × 250	1880
OCA-114D	11 × 4	7/8	12821	3,5	8,2	670	290	150	600	5/8"	1/2"	2 × 250	1880
OCA-124D	12 × 4	1,25	18680	3,5	10,4	770	365	150	700	3/4"	5/8"	2 × 300	3280
OCA-100S	14 × 3	1,5	22930	2,5	12,8	770	365	150	700	5/8"	1/2"	2 × 300	3280
OCA-150K	14 × 4	1,8	27053	2,5	17	770	365	150	700	3/4"	5/8"	2 × 300	3280
OCA-200L	16 × 3	2	35299	2,5	16,7	870	420	150	800	5/8"	1/2"	2 × 350	5860
OCA-200S	18 × 3	2,5	36963	2,5	18,8	870	470	200	800	5/8"	1/2"	2 × 350	5860
OCA-300S	18 × 4	3	43039	2,5	25	870	470	200	800	3/4"	5/8"	2 × 350	5860
OCA-400E	20 × 4	3,5	50345	2,5	38	1145	520	200	1075	1-1/8"	3/4"	2 × 350	5860
OCA-400S	20 × 4	4	65680	2,5	38	1145	520	200	1075	1-1/8"	7/8"	2 × 400	7420
OCA-500T	22 × 5	5	75372	2,5	52	1145	600	230	1075	1-3/8"	7/8"	2 × 400	7420
OCA-500S	22 × 5	7,5	108502	2,5	52	1145	600	230	1075	1-3/8"	7/8"	2 × 450	10480
OCA-600T	22 × 5	9	131974	2,5	57	1260	600	230	1190	1-3/8"	7/8"	2 × 500	15040
OCA-285	28 × 5	10	144994	2,5	73	1260	742	230	1190	1-3/8"	7/8"	2 × 500	15040
OCA-286	28 × 6	15	210385	2,5	110	1570	742	400	1500	1-3/8"	7/8"	2 × 630	19200

Also available:

OEA series
EVAPORATOR

OEJ series
EVAPORATOR

OEB series
EVAPORATOR

OED series
EVAPORATOR